


- 01 QBT 450™ ROOF TRAY
- 02 INTERNAL GUTTER
- 03 QBT 450™ CONTINUOUS ALUMINIUM EXTRUSION
- 04 DOWNTURN TO ROOFTRAY
- 05 STOPEND
- 06 45 X 70 mm H3.2 TREATED TIMBER BATTEN @ 450 CENTRES
- 07 VAPOUR PERMABLE ROOF UNDERLAY
- 08 10-GAUGE STAINLESS STEEL PAN HEAD 50MM, OR 2.8 X 50 mm FLAT HEAD R-DRIVE GALV NAILS
- 09 AIR-Z 3-D WOVEN MESH
- 10 MEMBRANE TO INTERNAL GUTTER
- 11 20 X 50 mm H3.2 TREATED CAVITY BATTEN
- 12 18 mm PLYWOOD
- 13 STARTER FLASHING

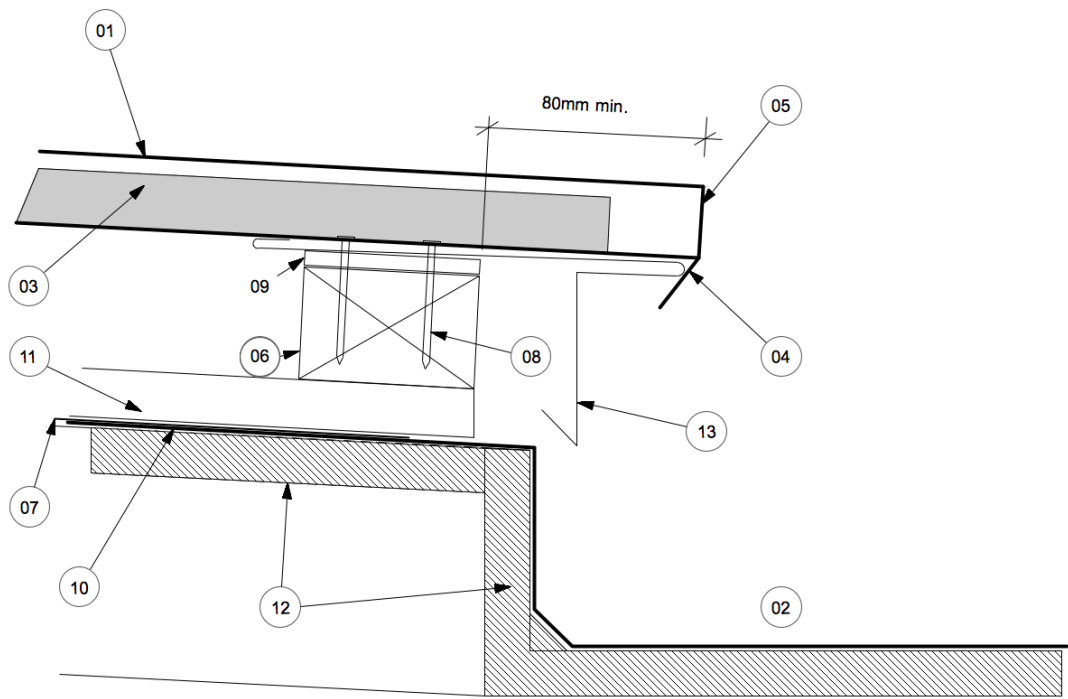

www.qbt450.nz

QUICK BATTEN TRAY SYSTEM - QBT 450™	Date: 20.05.2020
INTERNAL GUTTER DETAIL	Scale: 1:2 on A3
COPYRIGHT RESERVED NO REPRODUCTION OR COPY WITHOUT WRITTEN CONSENT FROM CONSTRUCTION CONNECTION AND CONSULTANCY LTD	
REV: 01	A-16